

(4CH, 8CH)




(16CH)



**Net168** (4CH, 8CH)  
**Tracker168** (16CH)  
**Hybrid Integration DVR**

WinXP Embedded DVR

- WinXP Embedded OS (DOM Disk) \_\_\_\_\_**  
No More Breakdown \*1
- Full Range \_\_\_\_\_**  
4ch, 8ch, 16ch
- High Resolution \_\_\_\_\_**  
up to 640x 480 pixels
- Quardplex \_\_\_\_\_**  
Rec, Playback, Archive, Remote Viewing
- Hardware Watch Dog \_\_\_\_\_**
- Hot Standby Rec \_\_\_\_\_**  
Always Recording \*2
- Redundant Rec (optional) \_\_\_\_\_**  
No more Data Loss
- Smart Motion Activity Search \_\_\_\_\_**
- POS Overlay (date/time, transaction log ...) \*4 \_\_\_\_\_**
- Motion/Alarm Turbo Rec \_\_\_\_\_**
- E-mail Notification \_\_\_\_\_**  
Hard Disk failure (or Alarm)
- Built-in CDR for Ease of Video Export (optional) \_\_\_\_\_**  
Standard AVI format  
Proprietary format with player
- Dynamic/ Static IP Supported \_\_\_\_\_**
- Bandwidth limitation \_\_\_\_\_**
- Time Synchronization (Network or Internet) \_\_\_\_\_**
- PSTN/ Internet Remote Viewer (supplied) \_\_\_\_\_**
- 3G Wireless Pocket Viewing & Control Software \*3 (supplied) \_\_\_\_\_**
- Multi-site CMS (optional) \_\_\_\_\_**  
up to 128 DVRs/ PC
- Access Control Overlay (date/time, card nr, name ...) \*4 \_\_\_\_\_**

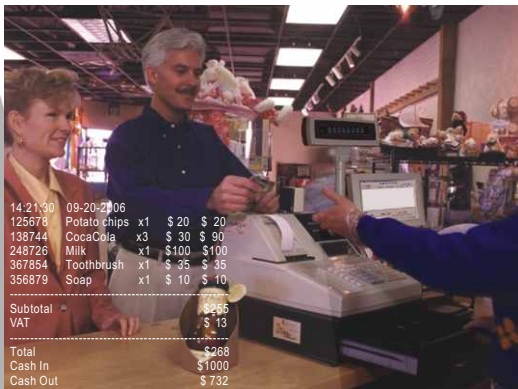

Notes: 1. Deduct the dead possibility caused by hard disk failure  
2. Support "Windows Mobile OS" 3G Handset ONLY  
3. The switching time to the other hard disk is about 1.5 minutes; DVR will NOT record during this period.  
4. Please contact us to have detailed tech info about the integration.

# Specification

Model nr	Net168		Tracker168
Operation system	WinXP Embedded (stored in DOMModule)		
Codec	Proprietary M-JPEG + Wavelet		
Watch Dog Timer	Hardware		
Video - Video input	x 4	x 8	x 16
- Loop through	x 4	N/A	x 16
- VGA output	x 1	x 1	x 1
- Sequential output (composite)	N/A	N/A	x 4
Audio - Input	Optional		
- Speaker out	Optional		
Alarm Input	Dry contact x4	Dry contact x8	Dry contact x 16
Control output	x 1	x 1	x 1
RS232 interface	x 2	x 2	x 2
TCPIP (internet)	RJ45 x 1	RJ45 x 1	RJ45 x 1
Hot Standby REC	Yes (valid for more than two HDDs configuration ONLY)		
Redundancy REC	Yes (valid for more than two HDDs configuration ONLY)		
Display rate (max) - Spot mode	120 f/s		120 f/s
- Divided mode	60 f/s		120 f/s
Display resolution (max)	640 x 480 pixels		
Recording rate (max.)	60 f/s		120 f/s
Recording resolution (max.)	640 x 480 pixels		
Recording quality	Low, Fair, Good, Better, Best		
Compression ratio	600:1 (1.5kB)		
Nr of installed hard disk (IDE Type, max)	x 2 (160/250/ 500 GB)		x 3 (160/ 250/ 500 GB)
Water Mark	Yes		
Built-in CD Writer for AVI Export	Optional		Optional
AVI export media	CD Writer, external USB memory stick & etc..		
System alarm	Video Loss, Motion, External Alarm		
PTZ Control	Pelco, Panasonic, Kalatel, Bosch & others.		
Power source	90 to 264Vac, 50/60 Hz Switching		
Power consumption	< 50 W	< 50 W	< 185 W
Weight	Net:13.23 LB(6kg), Gross:17.64LB(8kg)		Net:33.07LB(15kg), Gross:41.89LB(19kg)
Dimension	335x435x45 (mm) 13.18x17.13x1.77 (inch)		473x430x111 (mm) 18.62x16.93x4.37 (inch)
Approval	CE, FCC		

Specifications are subject to change without prior notice




**Telexper Inc.**  
33235 Transit Avenue,  
Union City, CA 94587 U.S.A.  
Tel : +1.510.477.9150  
Fax : +1.510.477.9644

**Telexper International Inc.**  
3F-3, No. 2, Chien Pa Rd.,  
Chung Ho City, Taipei 235,  
Taiwan, R.O.C.  
Tel : +886 2.6620 5898  
Fax : +886 2.6620 6909



**Distributed By:**



168embedded-2-2