

# DIGITAL VIDEO RECORDER (XRS 2008/ XRS 2016)

## FEATURES

- High performance
  - MPEG 4 compression
  - D1 resolution supported
  - Pentaplex: Live, record, playback, backup, network
- Pure real time recording at 100fps
- Easy and intelligent functions
  - Programmable spot monitor (4 spot out)
  - Full control with mouse & remote controller
  - Supports Pan/Tilt/Zoom (PTZ) by mouse
- Powerful networking
  - Multi DVR access at the same time
  - DHCP, DDNS and IE browser support
- XMS (XR CMS) supported
  - Dual screen: max 126 ch each for live & playback
  - Event log for each channel, e-map function




## XRS2008/ XRS2016 SPECIFICATIONS

MODEL	XRS2016	XRS2008
PERFORMANCE	Pentaplex	
<b>VIDEO</b>		
COMPRESSION	MPEG4 codec	
TYPE	NTSC / PAL (Detected Automatically)	
RECORDING TYPE	Continuous/ Motion / Alarm	
VIDEO IN SIGNAL	1.0Vpp Composite (+-10%) / 75Ohm Balanced	
VIDEO IN CHANNEL	16ch(BNC)	8ch(BNC)
VIDEO OUT MAIN DISPLAY	1 VGA	
VIDEO OUT LOOP-OUT	16 ch(BNC)	8 ch(BNC)
VIDEO OUT SPOT-OUT	4ch Analog (BNC), 1 S-Video	2ch Analog (BNC), 1 S-Video
<b>AUDIO</b>		
INPUT/ OUTPUT	4 Line in / 1 Line out, RCA socket, Two-way Audio	
<b>LIVE DISPLAY</b>		
DISPLAY SPEED	400 fps	
<b>RECORDING</b>		
RECORDING RATE	120 / 100 fps - Max. CIF (360*240)	
RECORDING MODE	Intelligent & Scheduled: Daily, Weekly adjust specific hour for each channel	
<b>PLAYBACK</b>		
SCREEN SPLIT	1, 4, 8, 16	1, 4, 8
PLAYBACK SPEED	1, 2, 3, 4, 8, 16, 32, 64, 128 x	1, 2, 3, 4, 8, 16, 32, 64 x

### SOLE AGENT:

STORAGE		
HDD/CAPACITY	Up to 3 HDD ( Not Capacity limited )	Up to 2 HDD ( Not Capacity limited )
IDE	IDE supported (option)	
SECONDARY STORAGE	USB Default (USB Memory Stick, USB HDD, ODD)	
BACKUP		
FILE FORMAT	AVI, JPG, BMP	
MEDIA	USB Device (HDD, DVD, Flash Memory), Network	
SCREEN		
DISPLAY SPLIT	1, 4, 5, 6, 8, 9, 13, 16	1, 4, 5, 6, 8
INTERFACE	Graphic User Interface	
NETWORK		
PROTOCOL	TCP/IP (Dynamic IP Support), DHCP, DDNS	
PHYSICAL / MAC LAYER	RJ45, Ethernet	
BROWSER	Remote S/W provided, Web Browser (Internet Explorer)	
PAN/ TILT / ZOOM (PTZ)		
SIGNAL INPUT	RS-485 Interface	
FIRMWARE / ON-SCREEN DISPLAY SETTINGS		
FIRMWARE UPDATE	USB or Network	
OSD LANGUAGE	English, Chinese, French, Russian, Japanese, Polish, Slovakian, Italian, Hungarian	
PHYSICAL		
CONTROL DEVICE	Keypad, PTZ Control keyboard, Remote controller, USB mouse/ Keyboard (optional)	
USB PORT	USB 2.0(Front: 2, Rear: 1)	
DIMENSION	430(W) x 87(H) x 460(D) mm	
WEIGHT	9 KG	

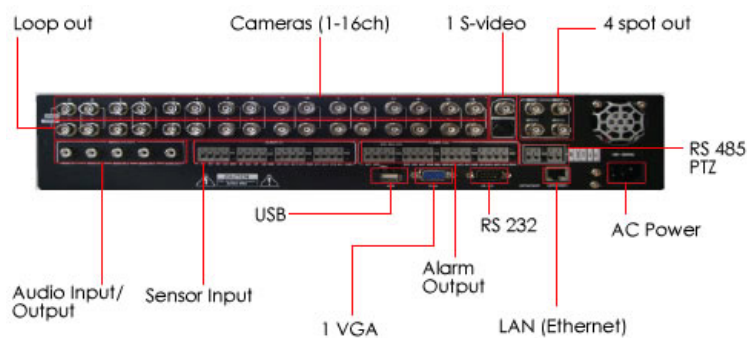

**SOLE AGENT:**