

H55ZAME-F-PR02




Built-in 2.5X extender

Fog reduction

Heat haze reduction

Image stabiliser

Auto Focus

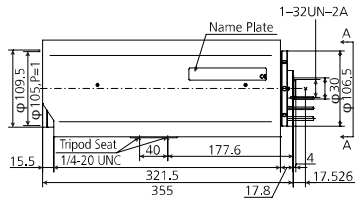

Unit:mm

Format Size	1/2" format	
Focal Length	12~660mm(30.5~1,680mm)	
Max. Aperture Ratio	1:4.0(f=12mm)~18.2(f=1,680mm)	
Iris Range	F4.0~F360	
Mount	C	
Horizontal	1/3" format	23.2~0.4°(9.0~0.2°)
Angle of View	1/2" format	31.6~0.6°(12.1~0.2°)
Min. Object Distance	7.0m	
Back Focal Length	80.34mm	
Filter size	105 P=1.0mm	
Dimensions	155×138×355mm	
Weight	5,790g	
Remarks	RS-232C, Preset, Auto-Iris with Manual Override (with D/A converter)	

*Figures in () are with 2.5X extender.


H55ZAME-F-PR01



Built-in 2.5X extender

Fog reduction

Auto Focus

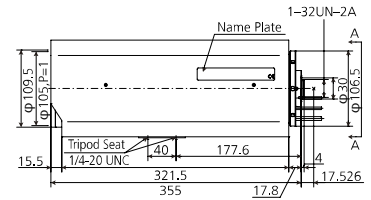

Unit:mm

Format Size	1/2" format	
Focal Length	12~660mm(30.5~1,680mm)	
Max. Aperture Ratio	1:4.0(f=12mm)~18.2(f=1,680mm)	
Iris Range	F4.0~F360	
Mount	C	
Horizontal	1/3" format	23.2~0.4°(9.0~0.2°)
Angle of View	1/2" format	31.6~0.6°(12.1~0.2°)
Min. Object Distance	7.0m	
Back Focal Length	80.34mm	
Filter size	105 P=1.0mm	
Dimensions	155×138×355mm	
Weight	5,780g	
Remarks	RS-232C, Preset, Auto-Iris with Manual Override (with D/A converter)	


*Figures in () are with 2.5X extender.

H33ZME-P-PR01



Fog reduction

Auto Focus

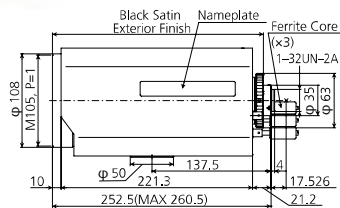

Unit:mm

Format Size	1/2" format	
Focal Length	10mm~330mm	
Max. Aperture Ratio	1:1.7~3.8	
Iris Range	F1.7~F560	
Mount	C	
Horizontal	1/3" format	26.4~0.9°
Angle of View	1/2" format	35.0~1.1°
Min. Object Distance	3.4m	
Back Focal Length	15.94mm	
Filter size	105 P=1.00mm	
Dimensions	152×126×252.5mm	
Weight	3,450g	
Remarks	RS-232C, Preset, Auto-Iris	


H20ZAME-F-PR01



For use with megapixel cameras

Fog reduction

Auto Focus

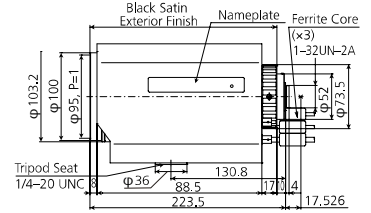

Unit:mm

Format Size	1/2" format	
Focal Length	12~240mm	
Max. Aperture Ratio	1:1.6~2.8	
Iris Range	F1.6~F720	
Mount	C	
Horizontal	1/3" format	23.0~1.2°
Angle of View	1/2" format	30.8~1.6°
Min. Object Distance	3.2m	
Back Focal Length	19.82mm	
Filter size	95 P=1.0mm	
Dimensions	152×138×223.5mm	
Weight	3,260g	
Remarks	For use with megapixel cameras, RS-232C, Preset, Auto-Iris with Manual Override(with D/A converter)	