




## Pocket Viewer

## Installation Guide

Telexper Incorporated © 1992-2008

Leading the security industry since 1992



Leading the security industry since 1992

DVP

## Copyright Notice


Information in this document is subject to change without notice. Telexper Incorporated may make improvements or changes in this manual and in the Digital Recorder at any time. The software, which includes the information contained described in this document is furnished under a license agreement and may be used or copied only in accordance with the terms of the agreement. It is against the law to copy the software except as specifically allowed in the license agreement. No part of this manual may be reproduced or transmitted in any form or by any means, including photocopying and recording, for any purpose without prior written permission of Telexper Incorporated.

© Telexper Incorporated 1992-2008








This device complies with Part 15 FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.
- (2) This device must accept any interference received including interference that may cause undesired operation.



# Pocket Viewer Installation Guide

Requirements:	
1. WinXP	
2. <b>Windows Mobile OS" i.s.o. "Windows CE OS"</b>	
3. Mobile device: 3G Mobile Phone with Windows CE 4.0 (e.g. Dopod 900 serials), Pocket PC with WiFi functionality.	
1. Install Microsoft ActiveSync software 4.0 or later version to the computer.	
2. Connect the 3G Mobile Phone/Pocket PC to the computer.	
3. Microsoft ActiveSync software will auto-detect the mobile device.	
4. The <b>Connected</b> message will display on Microsoft ActiveSync once the mobile device is successfully connected to the computer.	
 Please make sure that your mobile device is connected to the computer in order to complete the installation.	






5. Open the Manual CD, and click **Pocket View S/W - Handset** begin the installation.




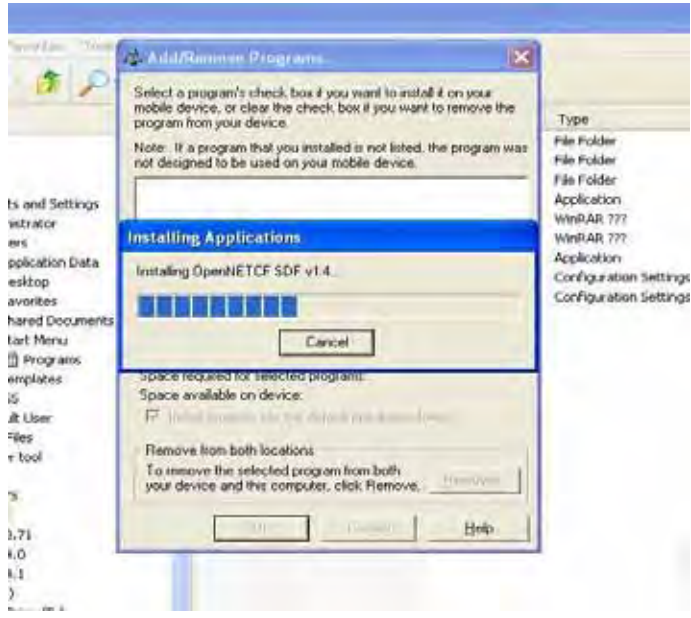


6. The unit will start installing the applications.






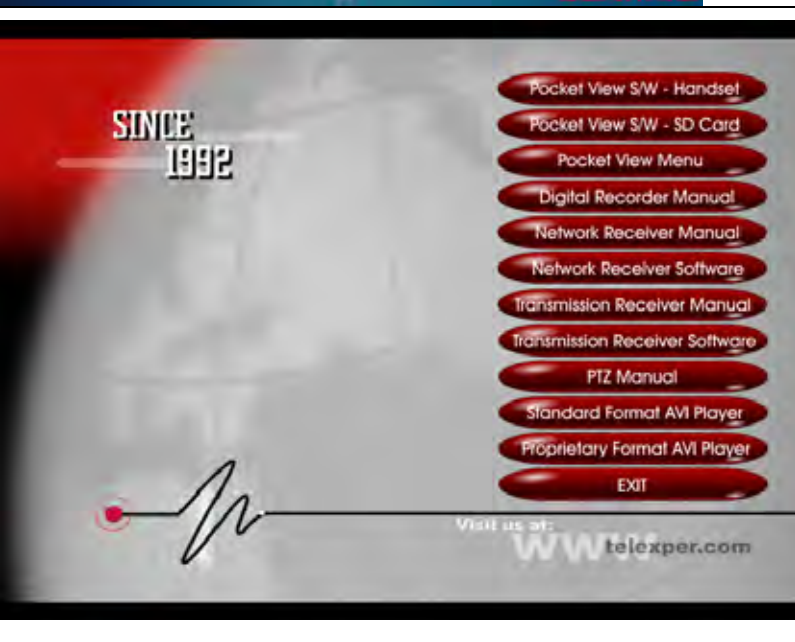
7. During the installation, the message "Please check your mobile device screen to see if additional steps are necessary to complete this installation" will appear. Select **OK**.

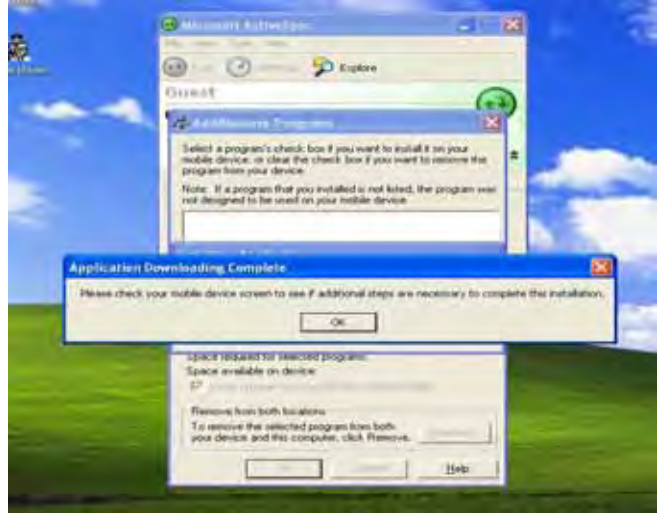
You can now continue your installation on your mobile device.



<p>8. Select <b>Install</b> on the bottom left corner to install OpenNETCF SDFv1.4.</p>	
<p>9. Installation is progressing.</p>	
<p>10. Select <b>Install</b> on the bottom left corner to install Telexper.</p>	


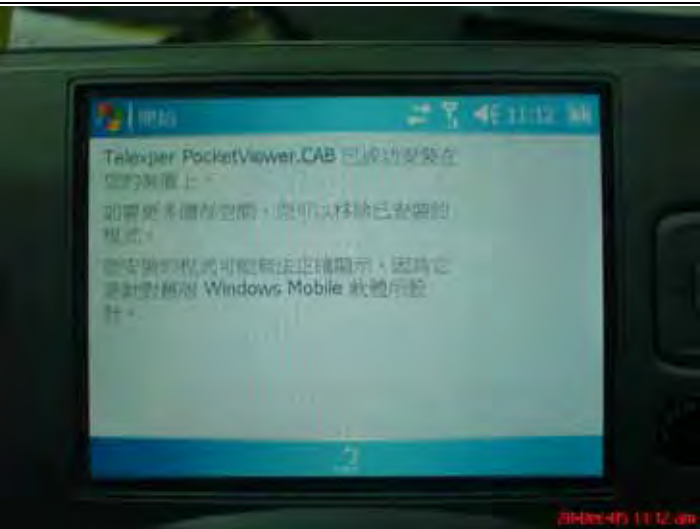
<p>11. Telexper Pocket Viewer installation is complete!          Select <b>OK</b> to leave the Installer and disconnect USB from the PC.</p>	
<p>12. To enter Pocket Viewer, select <b>Start</b>, point to <b>Program files</b>, and then open <b>PocketViewer</b>.</p>	
<p>13. You could also install the software directly on your mobile device by using SD card:</p> <ol style="list-style-type: none"> <li>1) Open the Manual CD on your PC click <b>Pocket View S/W – SD CARD</b></li> <li>2) Select SD CARD device, copy the two files below to the SD CARD:              ppcv_OpenNETCF.SDF.ppc3.armv4.cab              ppcv_PocketViewer_PPC.ARMV4.CAB</li> <li>3) Open both files on the mobile device, and follow the instructions to install.</li> <li>4) To enter Pocket Viewer, select <b>Start</b>, point to <b>Program files</b>, and then select <b>PocketViewer</b></li> </ol>	






# Software Operations


1. To enter Pocket Viewer, select **Start**, point to **Program files**, and then select **PocketViewer**.


-  **Site Setup**
-  **Site List**
-  **Exit**




2. On the main screen, select  **Site Setup**.  
 Select **Add**, and then input DVR Name, Network IP Address and Password.

Once the setting is complete, select **X** to go back to the main screen.


 **Note:** The password has to be the same as the password of the local site.



3. In the Main Screen Select  **Site List**. Double-click on the desired DVR to view LIVE.



4. The system is connecting.






5. All cameras of the selected DVR will be shown on the screen. Move the cursor to the desired camera, and then click to view full screen.



# Event Alarm


1. Once an event alarm is triggered, the mobile device (3G Mobile phone) will vibrate and a letter "E" will appear on the upper-left corner of the alarmed channel.

 Note: If an Event alarm is triggered while Pocket Viewer is minimized, Pocket Viewer will immediately pop up on the main screen.



2. Move the cursor to the alarmed camera, and then click to view full screen.



 **Users have to confirm the alarm on the local DVR in order to cancel the alarm on the mobile device!**

