

LCD / PLASMA TV MOBILE-MOUNT (FC-A390)



- Supports up to 100kg
- Comes with wheels and 1 height-adjustable MDF shelf
- Easy to install and relocate anywhere
- Cable management

CONFIGURATION	
MAXIMUM LOAD WEIGHT	100 KG
TV SIDE-TO-SIDE ROTATION	On wheels: 360°
PHYSICAL	
DISTANCE FROM FLOOR TO TOP OF POLE	1600mm
WIDTH AT BASE	1200mm
STANDARDS	
CLASSIFICATION	Meets VESA standards (X:400-800mm, Y: 200, 300, 400, 500)

SOLE AGENT:


Mobile Mounts

Specification

Product Features :







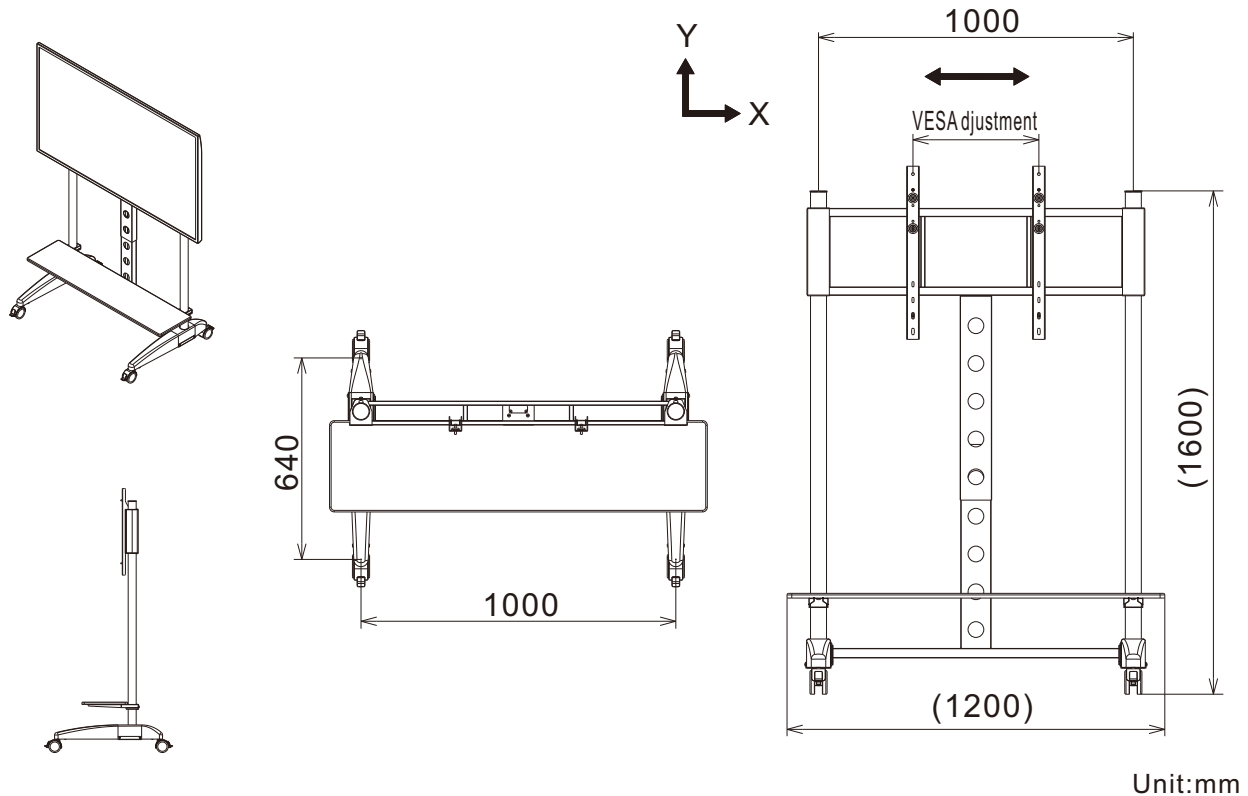









1. Loading Capacity: 100 kgs
2. Meet VESA : X : 400~800 ; Y: 200,300,400,500






※ Please consider Panel weight and manpower for doing the assembling in order to secure the safety of products and personals.



Parts List

MAIN PARTS


ITEM	1	2	3	4	5	6	7	8	9	10	11	12	13	14+15	16	17
PARTS																
QTY	1	1	1	12	4	2	2	2	2	1	2	6	2	2	4	2

ITEM	18	19	20	21	22	23	24	25	26
PARTS									
QTY	4	4	2	4	1	4	4	4	1


Mobile Mounts

Installation

- I: 1. Connect part ❶, part ❷ and part ❸ per below illustration, then fasten it with part ❹ (screws).
2. Insert the wheels (part ❺) to the H-base.

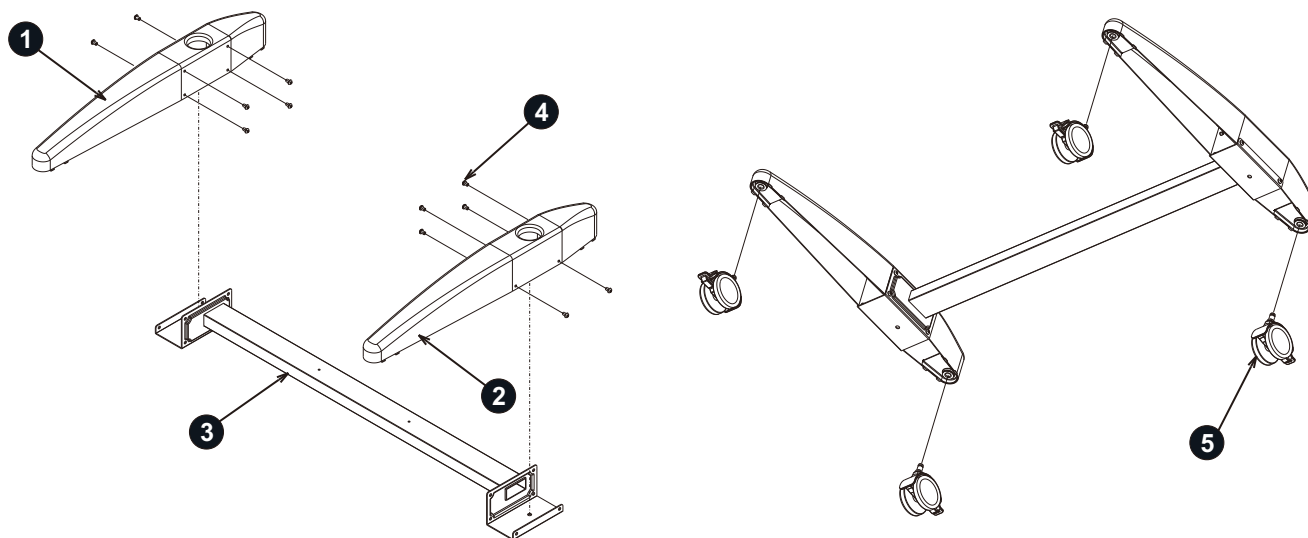


- II: Plug part ❻ into the H-base per illustration.

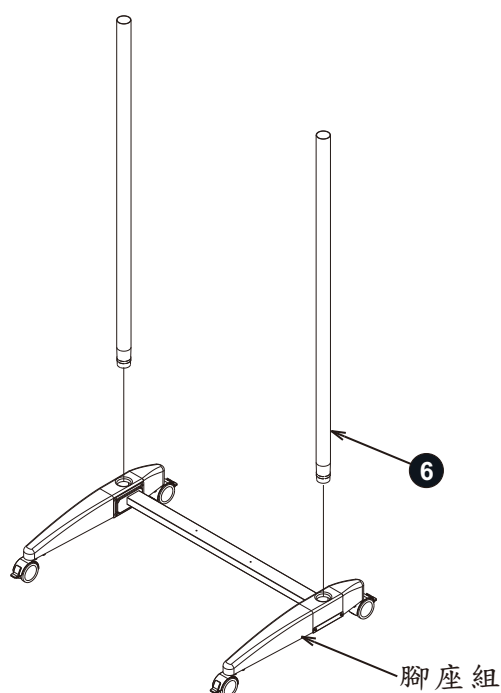


Mobile Mounts

Installation

- III: 1. Insert the part ⑨ into part ⑦, then assemble it with the stand and screw with part ⑧. Please don't tighten it completely to ensure the part ⑦ can be moved up-down.
2. Move down the part ⑦ with part ⑧ to the H-base.

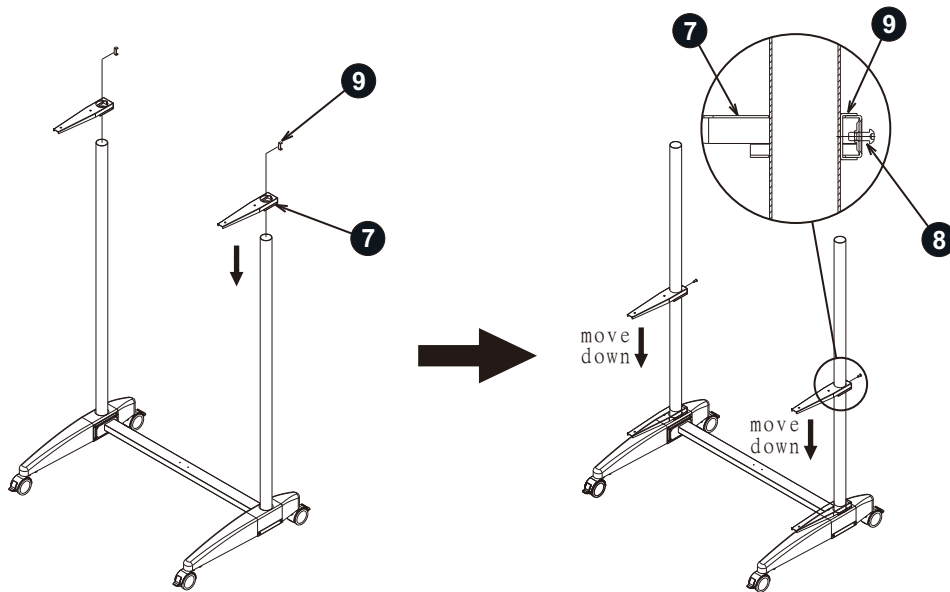


- IV: 1. Insert the part ⑪ into the part ⑩ each side, then connect it with the stand.
2. Adjust the position of part ⑩ with part ⑪ to fit user's need then fasten it with part ⑫ (screws).

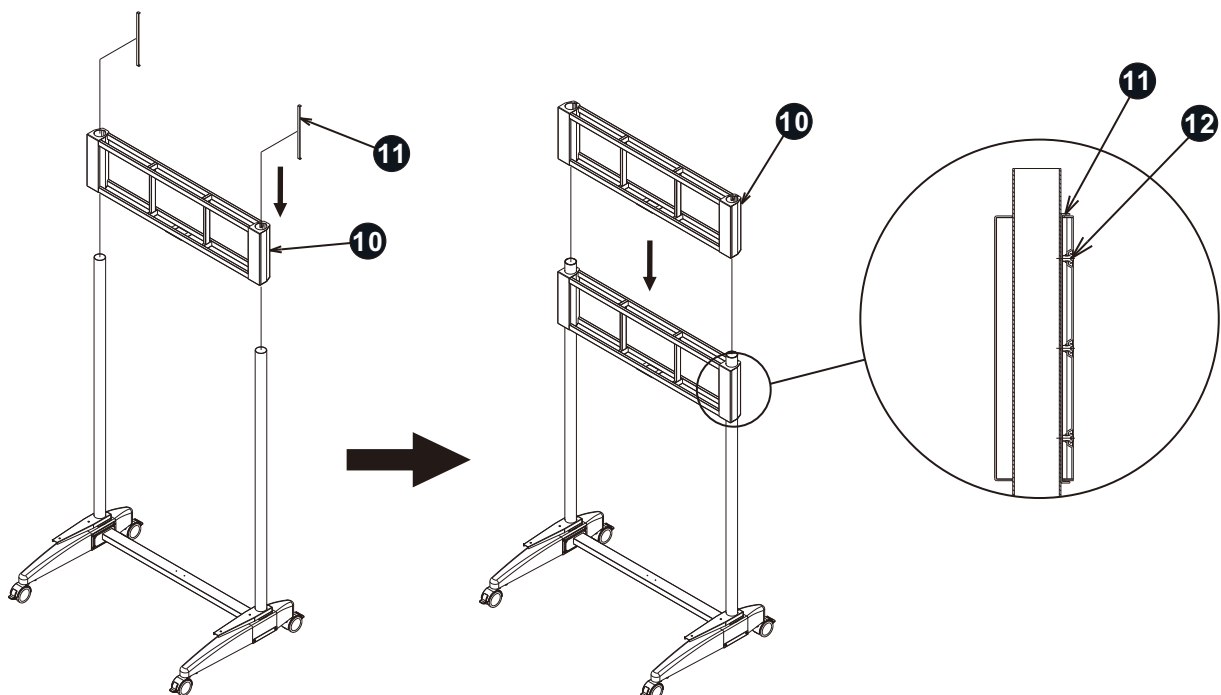


Mobile Mounts

Installation

V: Per illustration, insert part 13 to the top of poles and then ensure these covers are tightly plugged-in.

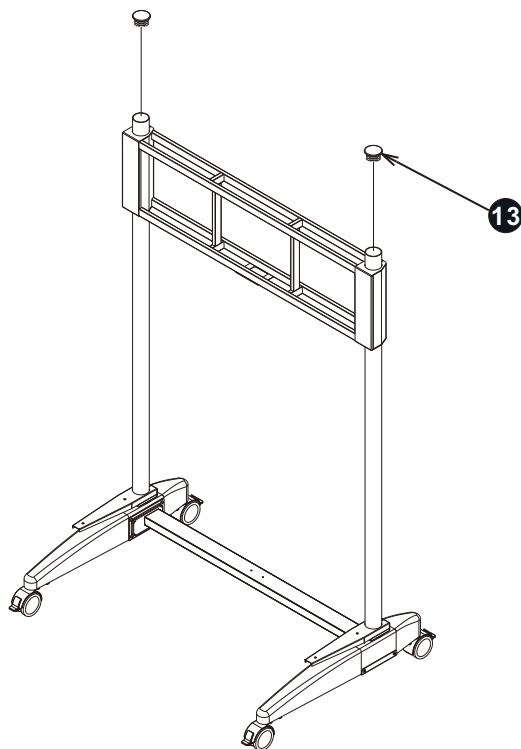



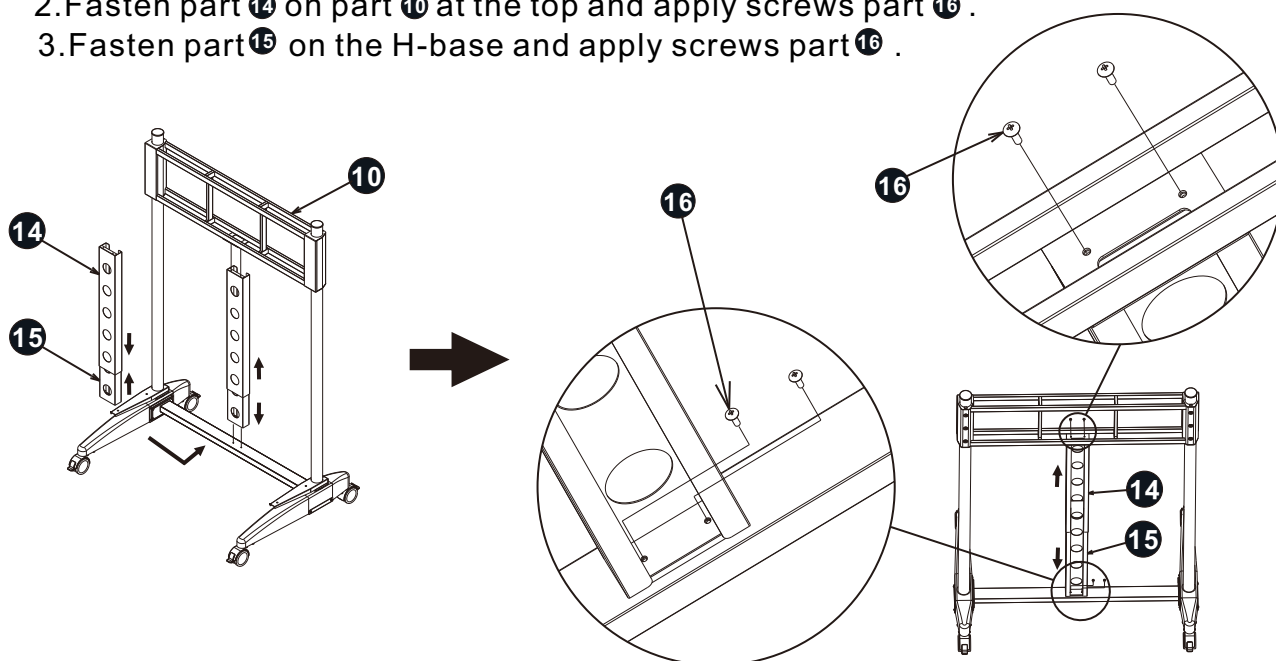

VI: 1. Per illustration, assemble the part 14 and part 15 on the H-base and under part 10 (The distance of part 14 and part 15 is adjustable)
2. Fasten part 14 on part 10 at the top and apply screws part 16.
3. Fasten part 15 on the H-base and apply screws part 16.





Mobile Mounts


Installation

- VII:** 1. Connect part 17 with TV panel. When mounting TV, please be aware of the VESA value of the TV to choose correspondent screws and washers accordingly.
2. User can fasten it with the screws per TV VESA holes.

screw selected		
19		M6x15
24		M6x10
18		M8x15
25		M8x10

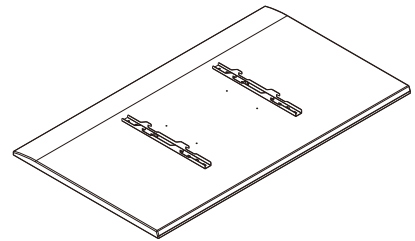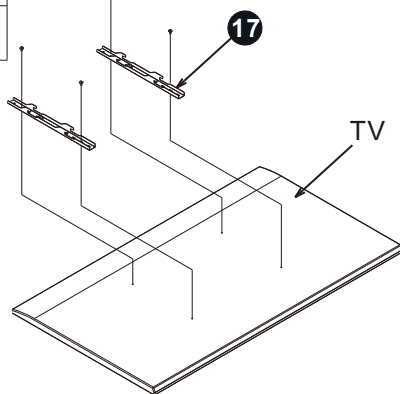

- VIII:** 1. Install the part 20 to the back side of TV mounting brackets .(over the square tube of part 10)
2. Please check if the TV panel is at the center of the stand; then fasten it with part 21 .

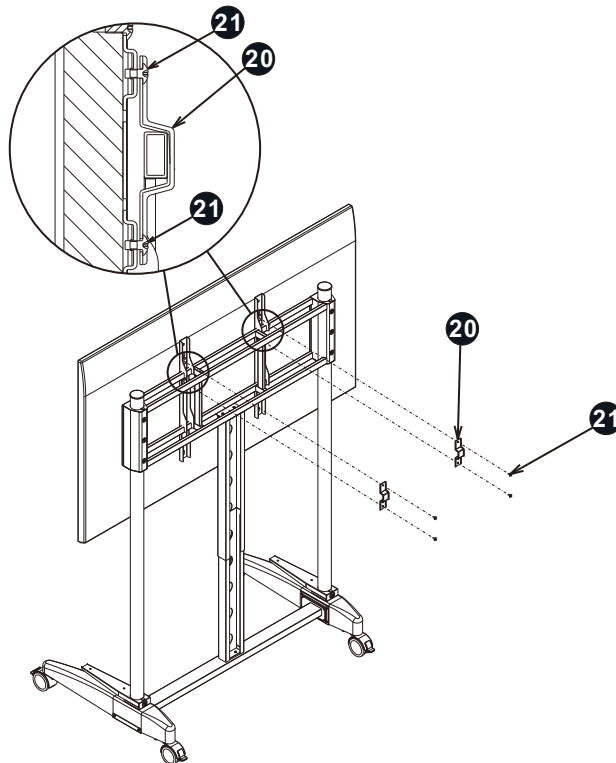

Mobile Mounts

Installation

- IX:** 1. Adjust the height of part ⑦ to fit user's need and tighten part ⑧ (screws) applied already on part ⑦ earlier. (as below).
2. Place the shelf part ②② on part ⑦, then fasten it with part ②③ screws underneath the shelf.

